



Data sheet KTZ67.5-53

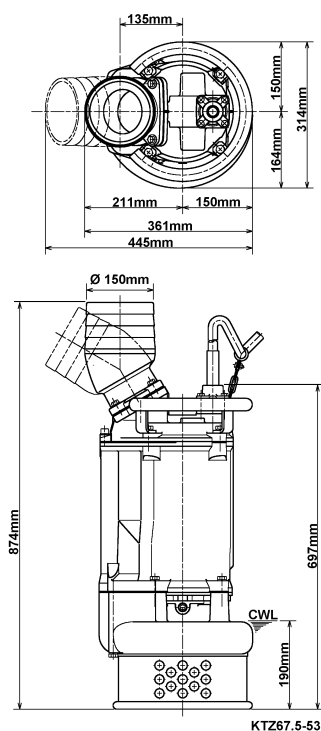

CWL: Continuous running water level

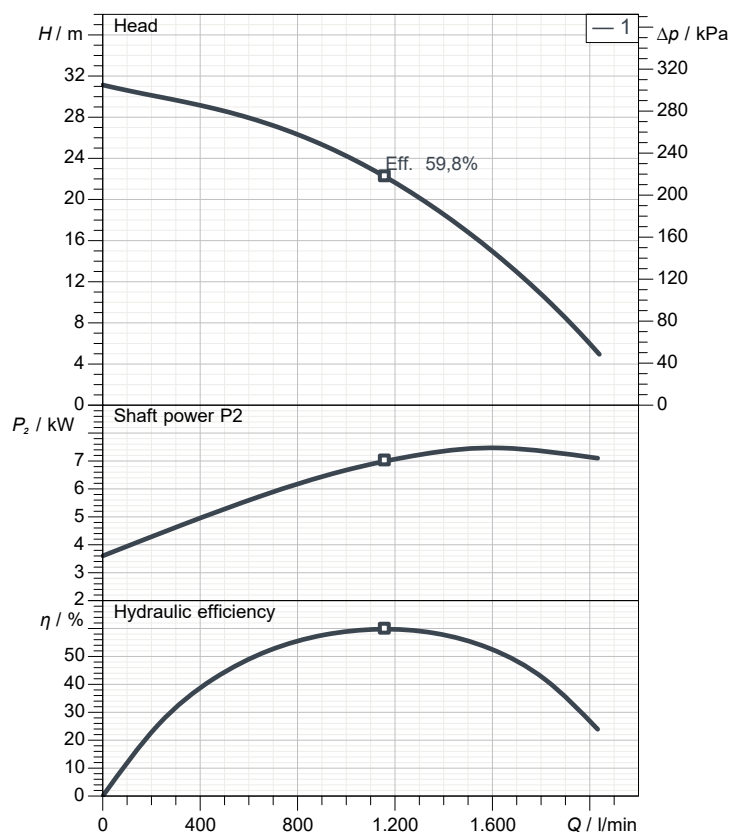

Specification

Electric submersible pump KTZ-series

Degree of protection IP 68

Pressure resistance max. 25 m

Type of impeller Semi-open

Max. solid handling 20 mm

Suitable for:

spring-/rain-/waste-/ground water, water containing sand

Electric motor

Dry-type submersible induction motor

Insulation class F 2Poles 2.945 1/min

Starting mode Direct starting

Rated voltage 400 V 50 Hz 3~

Power uptake 9,19 kW

Rated power 7,50 kW

Rated current 15,1 A

Start current 117,9 A

Cable

20m NSSHÖU 4Cx4mm²

Motor Protection

Circle thermal protector

(snap-action bi-metal device)

Shaft seal

Double inside mechanical seal in oil bath
additional lubrication by oil lifting device

Primary seal

Silicon carbide on silicon carbide

Secondary seal

Silicon carbide on carbon

Bearings

Shielded ball bearings, maintenance-free

Materials

Impeller	Chromium Iron HiCrFC
Pump casing	FC200 (EN-GJL-200)
Suction cover	FCD50 (EN-GJS-500-7)
Motor Frame	FC150 (EN-GJL-150)
Shaft	SUS420J2 (EN-X30Cr13)

Discharge size

6" (150mm) BS-Coupling / Hose Coupling (optional)


Weight

99 kg (dry weight of the pump only without cable)

Performance curve



KTZ67.5-53

Discharge port	6"
Head	31,1 m
Flow	2.039,0 l/min
Rated power	7,50 kW
Power input	9,19 kW
Phases	3~
Voltages	400 V
Frequency	50 Hz
Rated current	15,1 A
Starting current	117,93 A
Number of poles	2
Speed	2.945 1/min
Starting mode	Direct starting
Insulation class	F

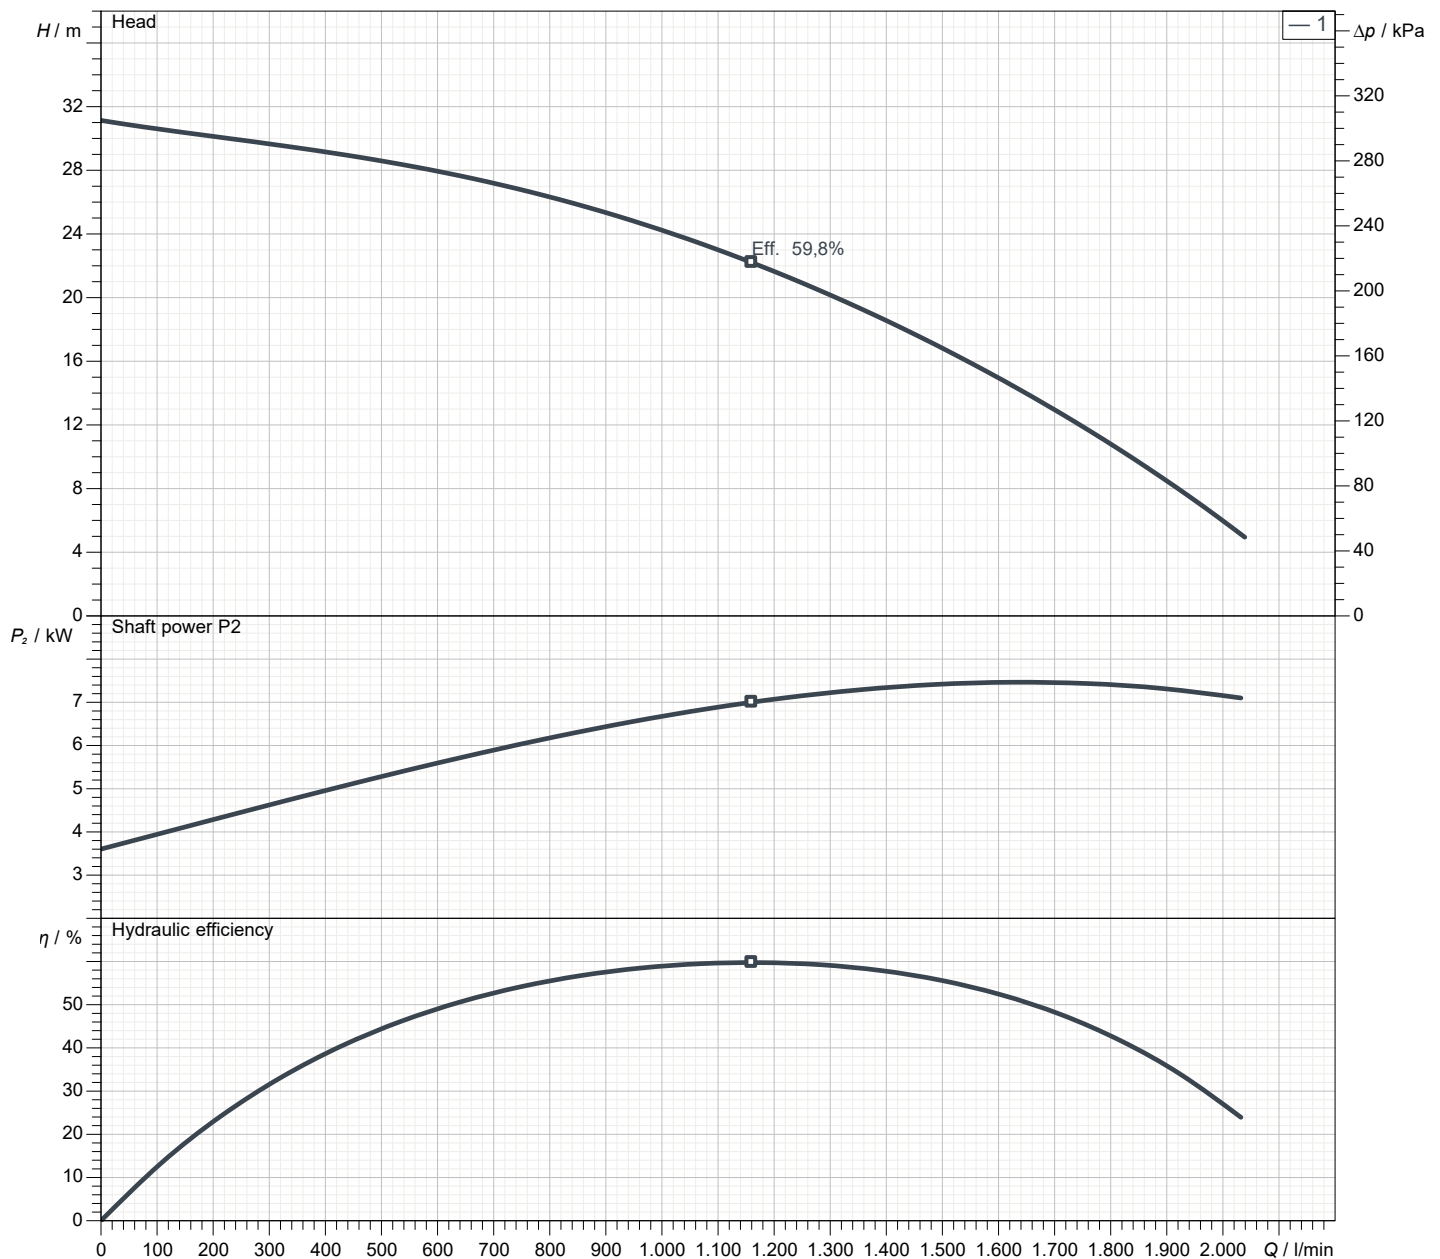

Dimensions

KTZ67.5-53

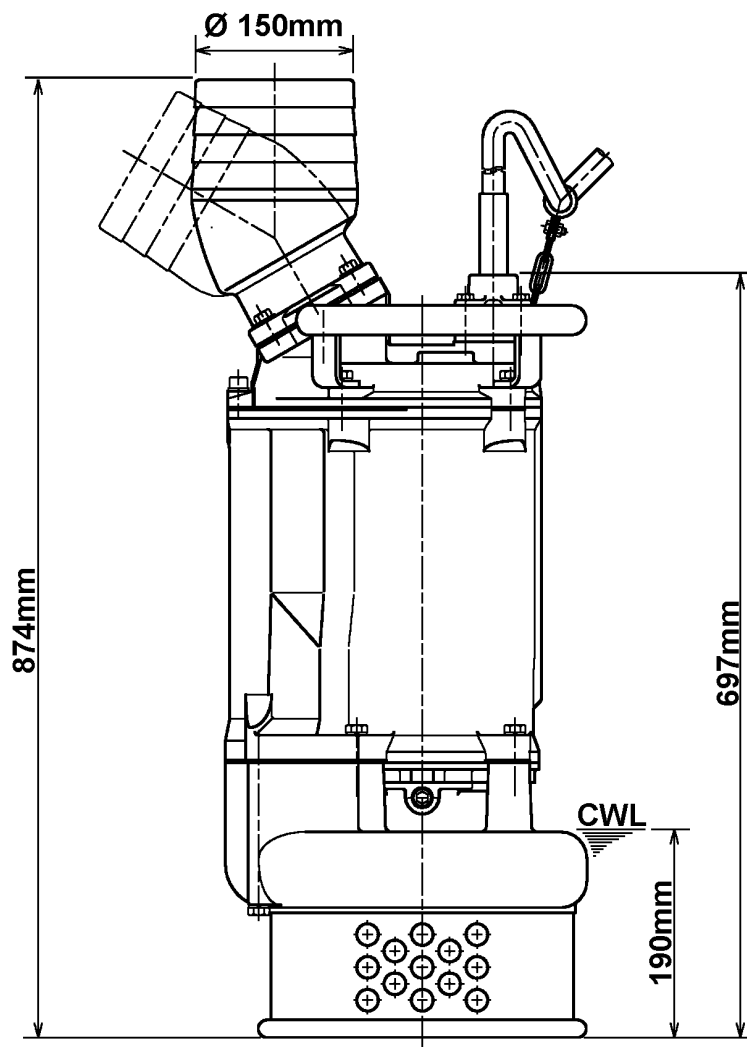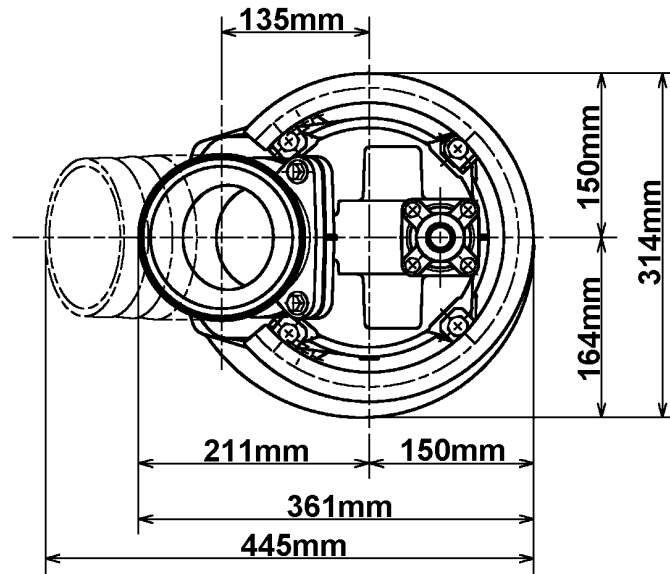


KTZ67.5-53

CWL: Continuous running water level
LWL: Lowest running water level

Sectional drawing

KTZ67.5-53

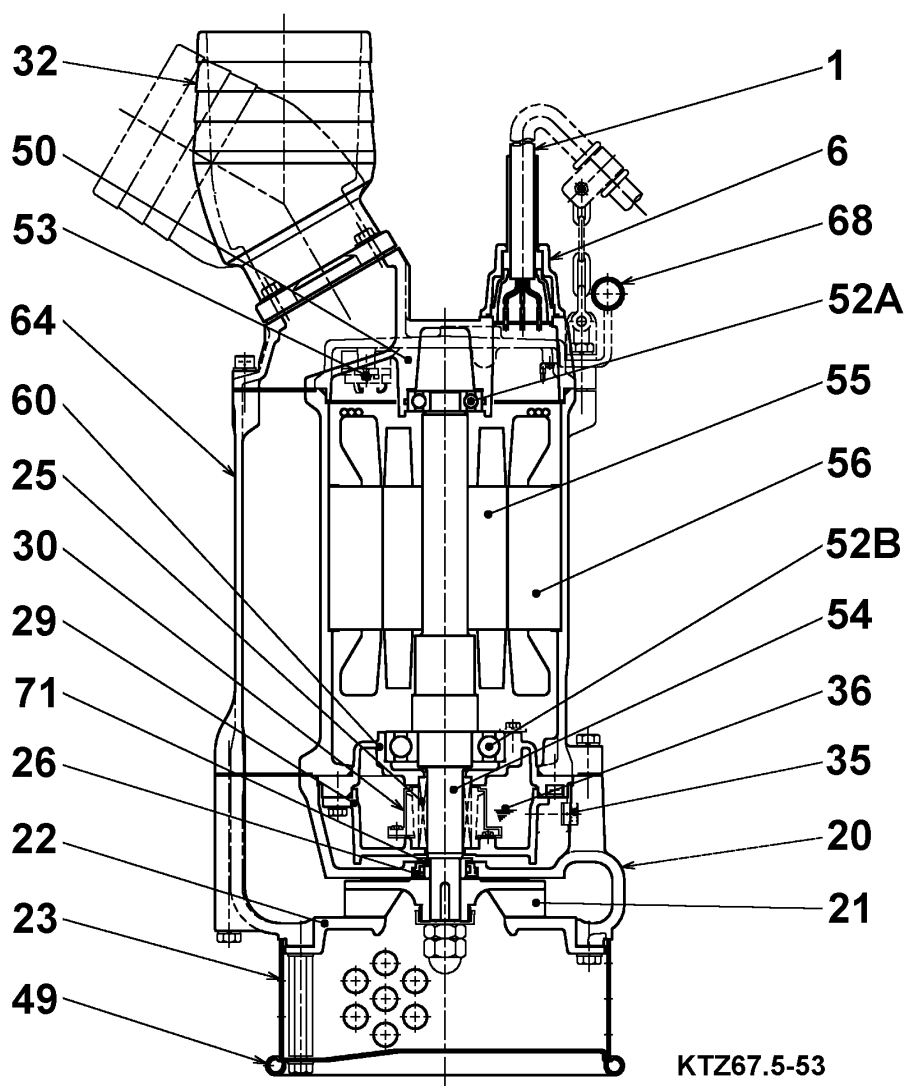

KTZ67.5-53

No.	Description	Remark	No.	Description	Remark
1	Cable	20m NSSHÖU	52B	Lower bearing	6309ZZC3
6	Stuffing box	FC200 (EN-GJL-200)	53	Motor Protector 380/400/415V-50Hz	KA314-HRXL00 (H.C)
20	Pump casing	FC200 (EN-GJL-200)	54	Shaft	SUS420J2 (EN-X30Cr13)
21	Impeller	Chromium Iron HiCrFC	55	Rotor	.
22	Suction cover	FCD50 (EN-GJS-500-7)	56	Stator	.
23	Strainer	Steel plate	60	Bearing Housing	FC150 (EN-GJL-150)
25	Mechanical seal	HT-3035N	64	Motor Frame	FC150 (EN-GJL-150)
26	Labyrinth ring only	SUS304 (EN-X5CrNi18-10)	68	Handle	steel pipe / Sectional steel
29	Oil casing	FC200 (EN-GJL-200)	71	Shaft protection sleeve	SUS403 (EN-X6Cr13)
30	Oil distributor	Plastic			
32	Discharge coupling	Aluminium alloy casting			
35	Oil screw	SUS304 (EN-X5CrNi18-10)			
36	Lubricant	Turbine oil (ISO VG32)			
49	Bottom Plate	Steel plate			
50	Main cover	FC150 (EN-GJL-150)			
52A	Upper bearing	6305ZZC3			