

Ordering Information

Single Short

Housing Part Number	Filter Element	Unit Type	WIF KIT Available	Drain	Bracket Included	Fuel In and Fuel Out	Port Size
FH24000	FS53021	Single Short	Yes	Yes	No	Bottom In / Bottom Out	1-5/16"-12 UN/UNF-2A 37° Flare


WIF KIT Part Number: (SP1290)

Replacement Filters

Part Number	Description
FS53021	NanoNet 5 micron (short)

Performance

Filter Restriction vs Flow

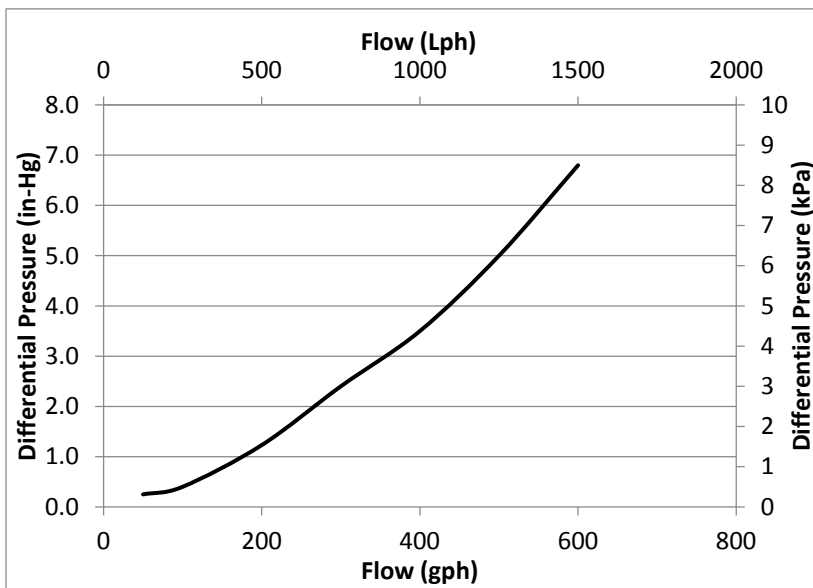

Specifications

Specification	Single Short
Height Overall	19.2" (488 mm)
Depth Overall	8.75" (222 mm)
Width, max	8.2" (208 mm)
Weight (Dry)	31 lbs (14.1 kg)
Fuel Capacity (w/o filter)	1.2 gal (4.6 L)
Fuel Connections	1-5/16" -12 UN/UNF-2A
Fuel Flow Rate	360 gal/hr (22.7 L/min)
Water Holding Capacity	66 fl oz (1970 ml)
Filter Service Clearance	Min. 10.6" (270 mm)
Engine Displacement	5-38 L
Engine Flow Rate	40-153 GPH (2.52-9.65 LPM)
Fuel Types	Compatible for use with Diesel #1, Diesel #2, Kerosene, Biodiesel B20, and JP8

Mounting/Dimensions

Sea Pro® Single Short

