

Ordering Information

Duplex Short

Housing Part Number	Filter Element	Unit Type	WIF KIT Available	Drain	Bracket Included	Fuel In and Fuel Out	Port Size
FH24002	FS53021	Duplex Short	Yes	Yes	No	Bottom In / Top Out	1-5/16" -12 UN/UNF-2A 37° Flare


WIF KIT Part Number: (SP1299)

Replacement Filters

Part Number	Description
FS53021	NanoNet 5 micron (short)

Performance

Filter Restriction vs Flow

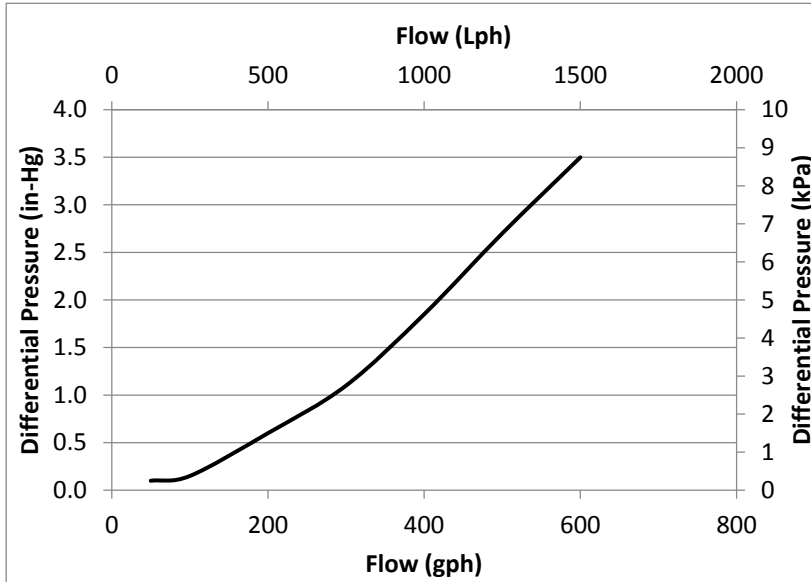

Specifications

Specification	Duplex Short
Height Overall	24.70" (678 mm)
Depth Overall	11.1" (222 mm)
Width, max	26.00" (208 mm)
Weight (Dry)	80 lbs (36.3 kg)
Fuel Capacity (w/o filter)	2.4 gal (9.2 L)
Fuel Connections	1-5/16" -12 UN/UNF-2A
Fuel Flow Rate	720 gal/hr (45.4 L/min)
Water Holding Capacity	132 fl oz (3940 ml)
Filter Service Clearance	Min. 10.6" (27- mm)
Engine Displacement	5-38 L
Engine Flow Rate	40-153 GPH (2.52-9.65 LPM)
Fuel Types	Compatible for use with Diesel #1, Diesel #2, Kerosene, Biodiesel B20, and JP8

Mounting/Dimensions

Sea Pro® Duplex Short

